


D2 | Milliken™ for Standard Textile Convertible Flooring

CLEAN IN PLACE

Fizz

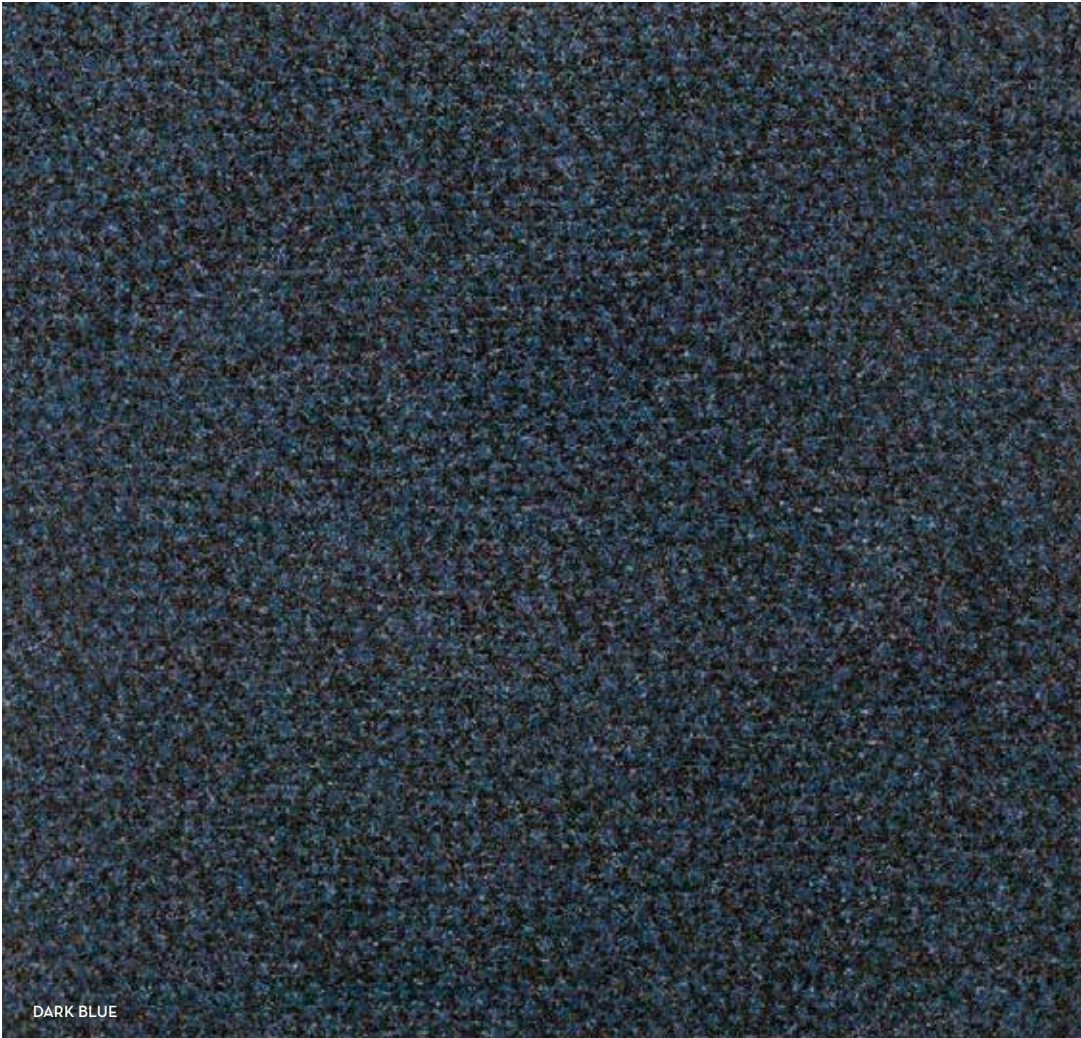

Additional
Fizz colors:



Available Memo Samples: Fizz
Brown | Dark Blue | D2 Adaptex™ Base



800.999.0400
[standardtextile.com/interiors](https://www.standardtextile.com/interiors)




STANDARD
TEXTILE est. 1940

D2 | Milliken™ for Standard Textile Convertible Flooring

CLEAN IN PLACE

Fizz

D2 FIZZ TOP

Colors	Dark Grey, Grey, Dark Blue, Blue, Dark Green, Mocha, Brown		
Available Sizes	Small Top: 32" x 39" Used with 24" x 35" Base	Medium Top: 32" x 57" Used with 24" x 50" Base	Large Top: 43" x 69" Used with two (2) 24" x 35" Base
			
Use With	D2 Adaptex™ Base		
Content	Nylon Tufted, Cut Pile Face Nitrile Rubber with Adaptex™ Active Surface Technology		
Weight (Top Only)	Small: 4.4 lbs. /piece (2 kg/top)	Medium: 6.2 lbs. /piece (2.8 kg/top)	Large: 9.3 lbs. /piece (4.2 kg/top)
Static Electricity	ATCC-134-20% R.H., 70°F - ≤ 3.5 KV, Permanent Conductive Fiber		
Other	Custom Printed Designs Available		

D2 FIZZ TOP & BASE

Nominal Thickness	0.22" (6.4mm)
Recycled Content	30% Pre-Consumer Recycled Content
Flammability	Radiant Panel ASTM E-648-17a - Class A
Smoke Density	NFPA-258 or ASTM E-662-17a - ≤ 450
Methaenamine Pill Test	CPSC FF 1-70 or ASTM D 2859-16 - Self-Extinguishing
Temperature Range	-15°F to 160°F (-26°C to 71°C)
Other	ADA / BS 8300 / ISO 21542 Compliant




800.999.0400
standardtextile.com/interiors

STANDARD
TEXTILE est. 1940


D2 | Milliken™ for Standard Textile Convertible Flooring

CLEAN IN PLACE

Strum

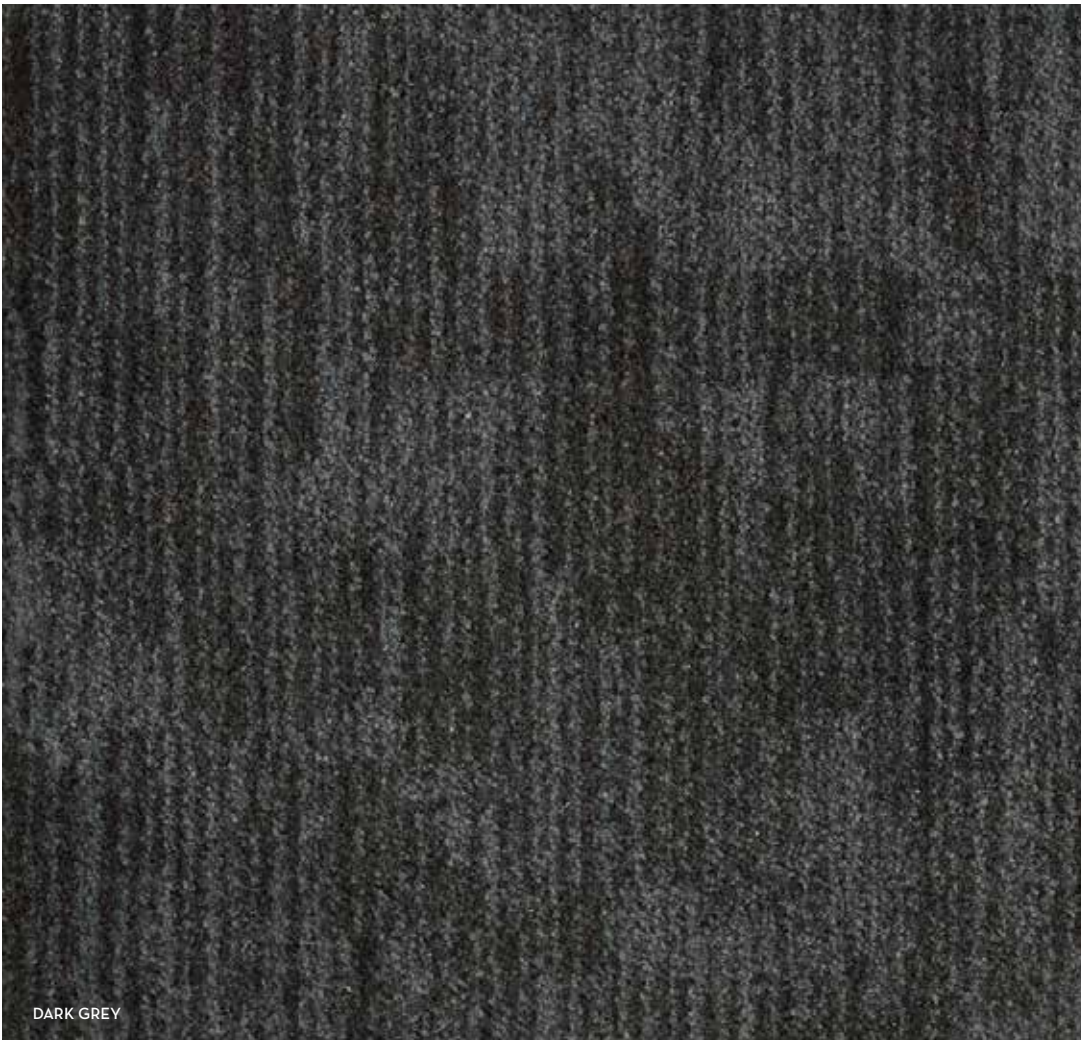

Additional
Strum colors:

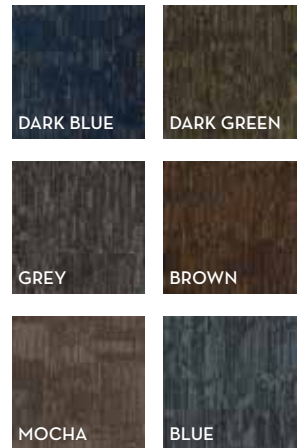

Available Memo Samples: Strum
Grey | Dark Grey | D2 Adaptex™ Base

design
expertise
fabrication

800.999.0400
standardtextile.com/interiors

STANDARD
TEXTILE est. 1940




5/2021

D2 | Milliken™ for Standard Textile Convertible Flooring

CLEAN IN PLACE

Strum

D2 STRUM TOP

Colors	Dark Grey, Grey, Dark Blue, Blue, Dark Green, Mocha, Brown		
Available Sizes	Small Top: 32" x 39" Used with 24" x 35" Base	Medium Top: 32" x 57" Used with 24" x 50" Base	Large Top: 43" x 69" Used with two (2) 24" x 35" Base
			
Use With	D2 Adaptex™ Base		
Content	Nylon Tufted, Cut Pile Face Nitrile Rubber with Adaptex™ Active Surface Technology		
Weight (Top Only)	Small: 4.4 lbs. /piece (2 kg/top)	Medium: 6.2 lbs. /piece (2.8 kg/top)	Large: 9.3 lbs. /piece (4.2 kg/top)
Static Electricity	ATCC-134-20% R.H., 70°F - ≤ 3.5 KV, Permanent Conductive Fiber		
Other	Custom Printed Designs Available		

D2 STRUM TOP & BASE

Nominal Thickness	0.22" (6.4mm)
Recycled Content	30% Pre-Consumer Recycled Content
Flammability	Radiant Panel ASTM E-648-17a - Class A
Smoke Density	NFPA-258 or ASTM E-662-17a - ≤ 450
Methaenamine Pill Test	CPSC FF 1-70 or ASTM D 2859-16 - Self-Extinguishing
Temperature Range	-15°F to 160°F (-26°C to 71°C)
Other	ADA / BS 8300 / ISO 21542 Compliant



800.999.0400
standardtextile.com/interiors

STANDARD
TEXTILE est. 1940


D2[™] | Milliken[™] for Standard Textile Convertible Flooring

CLEAN IN PLACE

Cross



Additional
Strum colors:

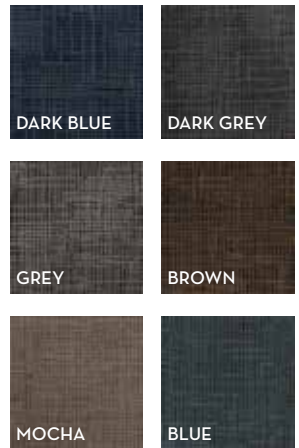

Available Memo Samples: Cross
Dark Green | Blue | Mocha | D2 Adaptex[™] Base

design
expertise
fabrication

800.999.0400
standardtextile.com/interiors

STANDARD
TEXTILE est. 1940




5/2021

D2 | Milliken™ for Standard Textile Convertible Flooring

CLEAN IN PLACE

Cross

D2 CROSS TOP

Colors	Dark Grey, Grey, Dark Blue, Blue, Dark Green, Mocha, Brown		
Available Sizes	Small Top: 32" x 39" Used with 24" x 35" Base	Medium Top: 32" x 57" Used with 24" x 50" Base	Large Top: 43" x 69" Used with two (2) 24" x 35" Base
			
Use With	D2 Adaptex™ Base		
Content	Nylon Tufted, Cut Pile Face Nitrile Rubber with Adaptex™ Active Surface Technology		
Weight (Top Only)	Small: 4.4 lbs. /piece (2 kg/top)	Medium: 6.2 lbs. /piece (2.8 kg/top)	Large: 9.3 lbs. /piece (4.2 kg/top)
Static Electricity	ATCC-134-20% R.H., 70°F - ≤ 3.5 KV, Permanent Conductive Fiber		
Other	Custom Printed Designs Available		

D2 CROSS TOP & BASE

Nominal Thickness	0.22" (6.4mm)
Recycled Content	30% Pre-Consumer Recycled Content
Flammability	Radiant Panel ASTM E-648-17a - Class A
Smoke Density	NFPA-258 or ASTM E-662-17a - ≤ 450
Methaenamine Pill Test	CPSC FF 1-70 or ASTM D 2859-16 - Self-Extinguishing
Temperature Range	-15°F to 160°F (-26°C to 71°C)
Other	ADA / BS 8300 / ISO 21542 Compliant



800.999.0400
standardtextile.com/interiors

STANDARD
TEXTILE est. 1940