



# D2<sup>™</sup> | Milliken<sup>™</sup> for Standard Textile Convertible Flooring

LAUNDERABLE

## Dash

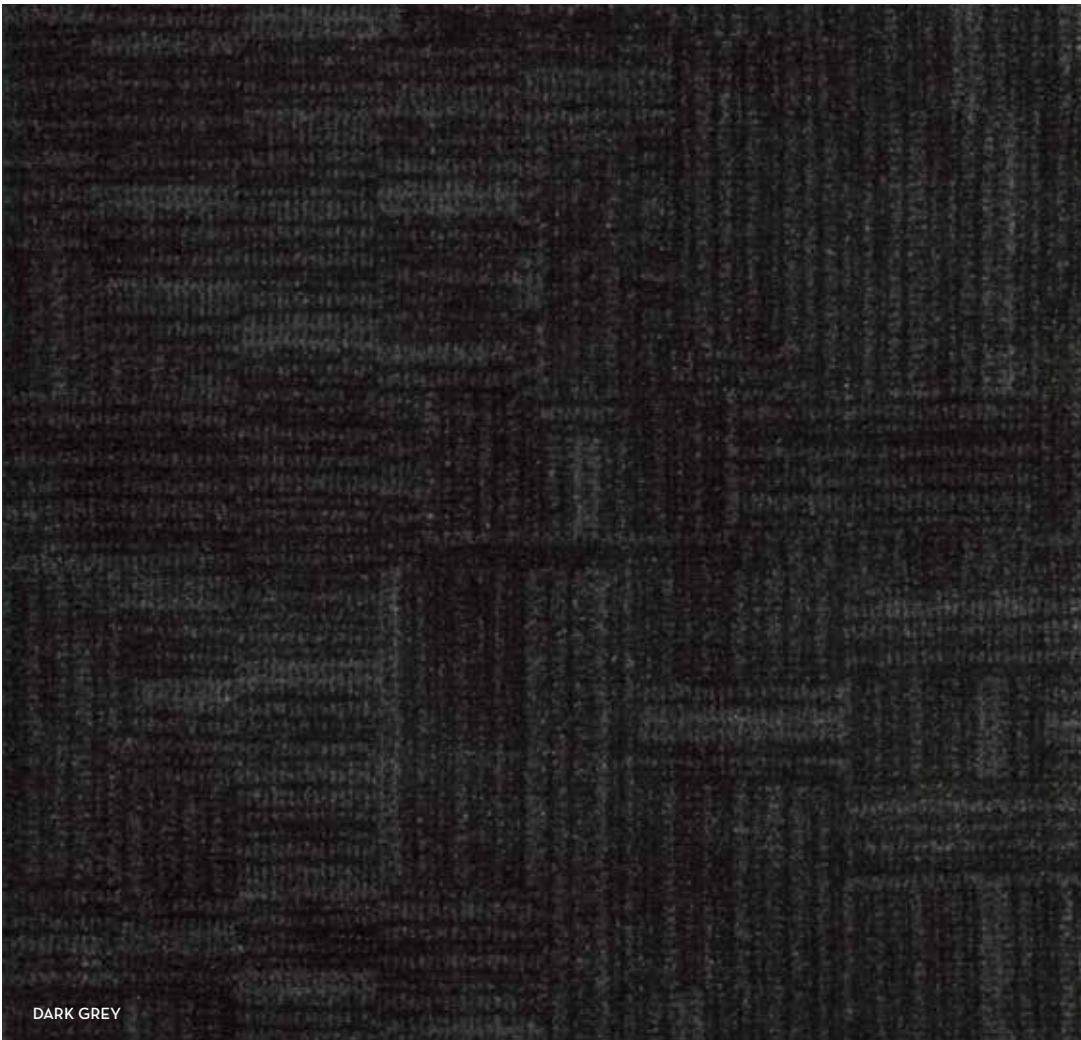

Additional  
Dash colors:



Available Memo Samples: Dash  
Dark Grey | D2 Adaptex<sup>™</sup> Base

design  
expertise  
fabrication

800.999.0400  
[standardtextile.com/interiors](http://standardtextile.com/interiors)

**STANDARD**  
TEXTILE est. 1940




5/2021

# D2 | Milliken™ for Standard Textile Convertible Flooring

LAUNDERABLE

## Dash

### D2 DASH TOP

<b>Colors</b>	Dark Grey, Grey, Brown		
<b>Available Sizes</b>	Small Top: 32" x 39" Used with 24" x 35" Base	Medium Top: 32" x 57" Used with 24" x 50" Base	Large Top: 43" x 69" Used with two (2) 24" x 35" Base
			
<b>Use With</b>	D2 Adaptex™ Base		
<b>Content</b>	Nylon Tufted, Cut Pile Face Nitrile Rubber with Adaptex™ Active Surface Technology		
<b>Weight (Top Only)</b>	Small: 4.07 lbs. /piece (1.85kg/top)	Medium: 5.95 lbs. /piece (2.7 kg/top)	Large: 10.36 lbs. /piece (4.7 kg/top)
<b>Lightfastness</b>	AATCC 16E - ≥ 4.0 at 80 Hours		
<b>Crocking</b>	AATCC 134 - ≥ 4.0 Wet or Dry		
<b>Static Electricity</b>	ATCC-134-20% R.H., 70°F - ≤ 3.5 KV, Permanent Conductive Fiber		
<b>Other</b>	Custom Printed Designs Available		

### D2 DASH TOP & BASE

<b>Nominal Thickness</b>	0.22" (6.4mm)
<b>Recycled Content</b>	30% Pre-Consumer Recycled Content
<b>Flammability</b>	Radiant Panel ASTM E-648-17a - Class A
<b>Smoke Density</b>	NFPA-258 or ASTM E-662-17a - ≤ 450
<b>Methaenamine Pill Test</b>	CPSC FF 1-70 or ASTM D 2859-16 - Self-Extinguishing
<b>Temperature Range</b>	-15°F to 160°F (-26°C to 71°C)
<b>Other</b>	ADA / BS 8300 / ISO 21542 Compliant




800.999.0400  
standardtextile.com/interiors

**STANDARD**  
TEXTILE est. 1940


# D2<sup>™</sup> | Milliken<sup>™</sup> for Standard Textile Convertible Flooring

LAUNDERABLE

Dot

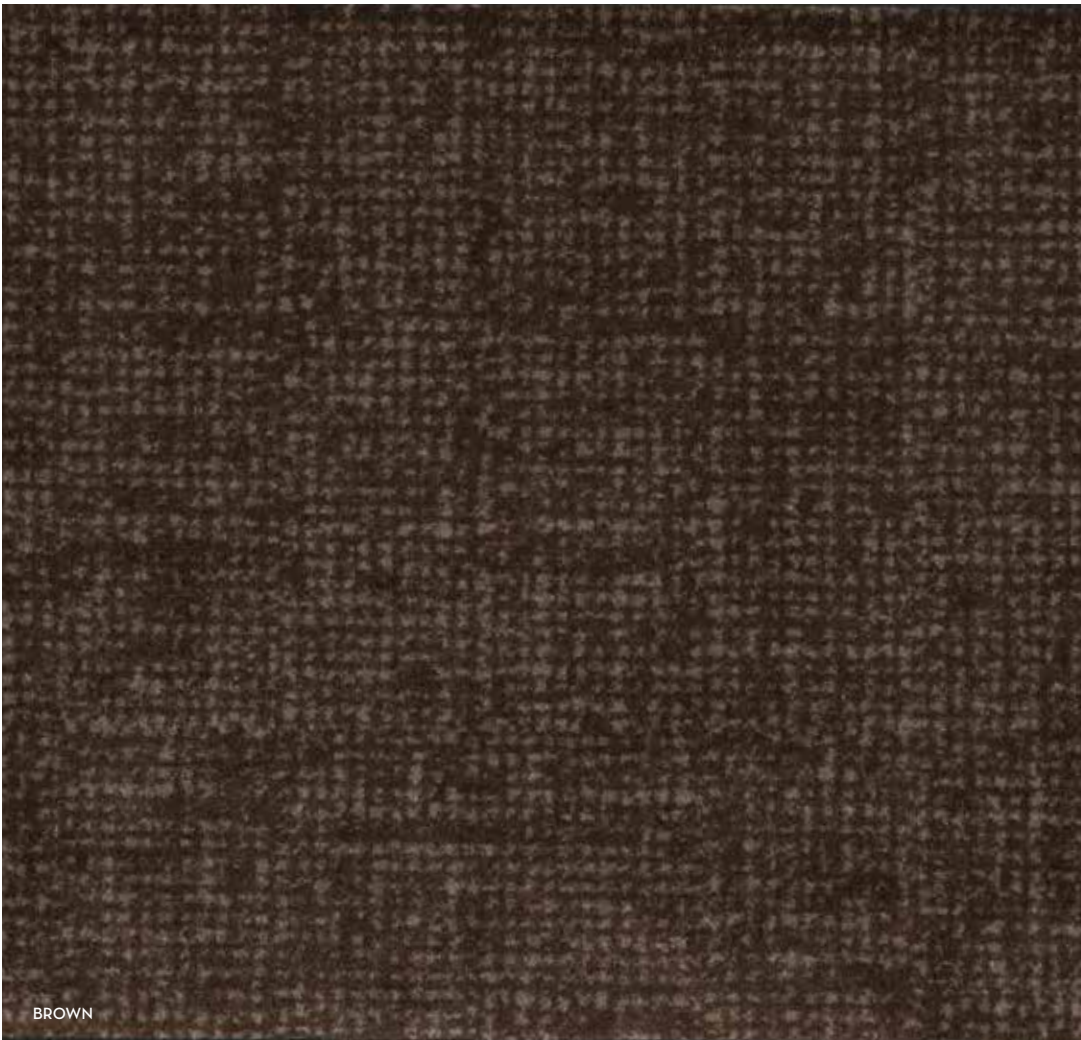

Additional  
Dot colors:



Available Memo Samples: Dot  
Brown | D2 Adaptex<sup>™</sup> Base

design  
expertise  
fabrication

800.999.0400  
[standardtextile.com/interiors](http://standardtextile.com/interiors)




**STANDARD**  
TEXTILE est. 1940

# D2 | Milliken™ for Standard Textile Convertible Flooring

LAUNDERABLE

Dot

## D2 DOT TOP

<b>Colors</b>	Brown, Grey, Dark Grey		
<b>Available Sizes</b>	Small Top: 32" x 39" Used with 24" x 35" Base	Medium Top: 32" x 57" Used with 24" x 50" Base	Large Top: 43" x 69" Used with two (2) 24" x 35" Base
			
<b>Use With</b>	D2 Adaptex™ Base		
<b>Content</b>	Nylon Tufted, Cut Pile Face Nitrile Rubber with Adaptex™ Active Surface Technology		
<b>Weight (Top Only)</b>	Small: 4.07 lbs. /piece (1.85kg/top)	Medium: 5.95 lbs. /piece (2.7 kg/top)	Large: 10.36 lbs. /piece (4.7 kg/top)
<b>Lightfastness</b>	AATCC 16E - ≥ 4.0 at 80 Hours		
<b>Crocking</b>	AATCC 134 - ≥ 4.0 Wet or Dry		
<b>Static Electricity</b>	ATCC-134-20% R.H., 70°F - ≤ 3.5 KV, Permanent Conductive Fiber		
<b>Other</b>	Custom Printed Designs Available		

## D2 DOT TOP & BASE

<b>Nominal Thickness</b>	0.22" (6.4mm)
<b>Recycled Content</b>	30% Pre-Consumer Recycled Content
<b>Flammability</b>	Radiant Panel ASTM E-648-17a - Class A
<b>Smoke Density</b>	NFPA-258 or ASTM E-662-17a - ≤ 450
<b>Methaenamine Pill Test</b>	CPSC FF 1-70 or ASTM D 2859-16 - Self-Extinguishing
<b>Temperature Range</b>	-15°F to 160°F (-26°C to 71°C)
<b>Other</b>	ADA / BS 8300 / ISO 21542 Compliant




800.999.0400  
standardtextile.com/interiors

**STANDARD**  
TEXTILE est. 1940



# D2<sup>™</sup> | Milliken<sup>™</sup> for Standard Textile Convertible Flooring

LAUNDERABLE

## Drawn

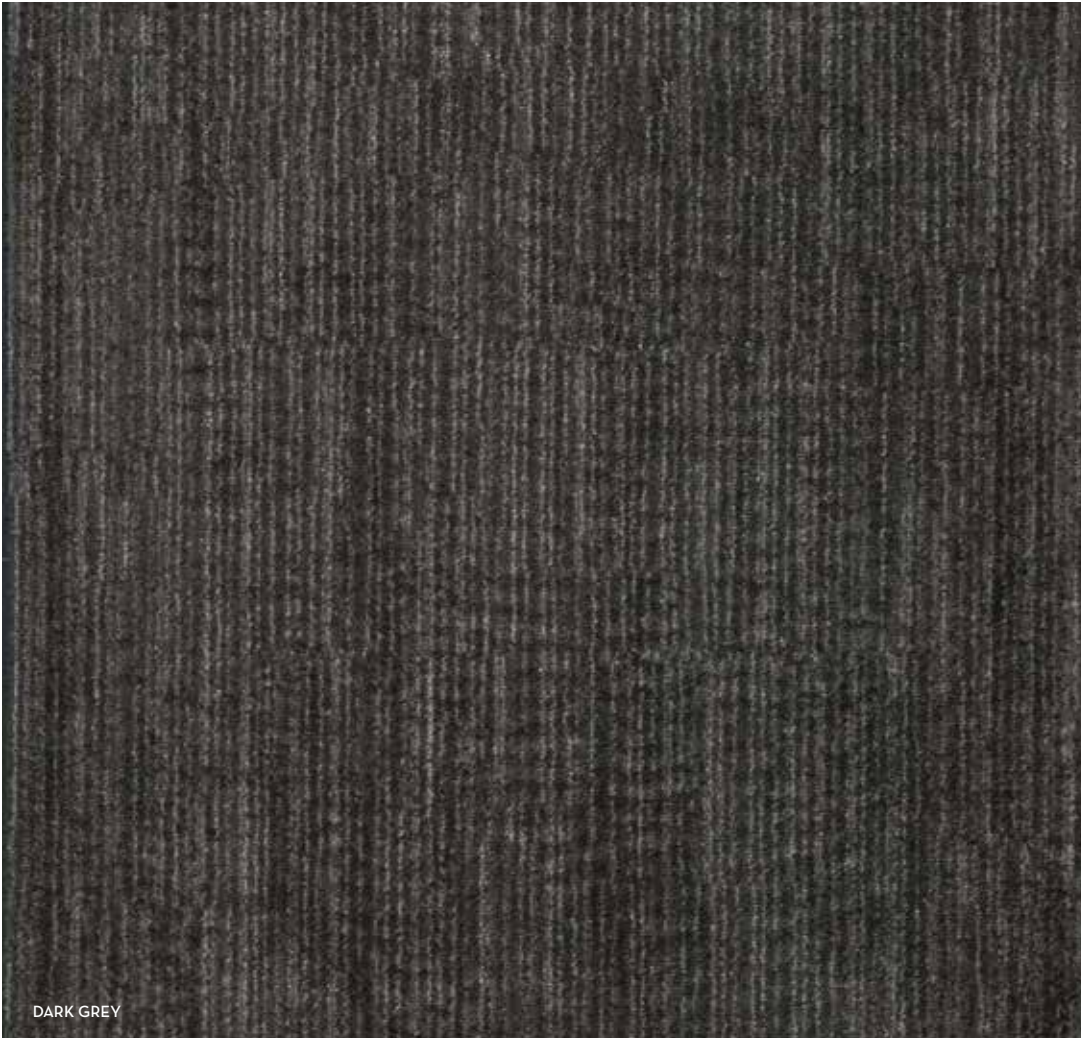

Additional  
Dot colors:



Available Memo Samples: Drawn  
Dark Grey | D2 Adaptex<sup>™</sup> Base

design  
expertise  
fabrication

800.999.0400  
[standardtextile.com/interiors](http://standardtextile.com/interiors)

**STANDARD**  
TEXTILE est. 1940




5/2021

# D2 | Milliken™ for Standard Textile Convertible Flooring

LAUNDERABLE

## Drawn

### D2 DRAWN TOP

<b>Colors</b>	Brown, Grey, Dark Grey		
<b>Available Sizes</b>	Small Top: 32" x 39" Used with 24" x 35" Base	Medium Top: 32" x 57" Used with 24" x 50" Base	Large Top: 43" x 69" Used with two (2) 24" x 35" Base
			
<b>Use With</b>	D2 Adaptex™ Base		
<b>Content</b>	Nylon Tufted, Cut Pile Face Nitrile Rubber with Adaptex™ Active Surface Technology		
<b>Weight (Top Only)</b>	Small: 4.07 lbs. /piece (1.85kg/top)	Medium: 5.95 lbs. /piece (2.7 kg/top)	Large: 10.36 lbs. /piece (4.7 kg/top)
<b>Lightfastness</b>	AATCC 16E - ≥ 4.0 at 80 Hours		
<b>Crocking</b>	AATCC 134 - ≥ 4.0 Wet or Dry		
<b>Static Electricity</b>	ATCC-134-20% R.H., 70°F - ≤ 3.5 KV, Permanent Conductive Fiber		
<b>Other</b>	Custom Printed Designs Available		

### D2 DRAWN TOP & BASE

<b>Nominal Thickness</b>	0.22" (6.4mm)
<b>Recycled Content</b>	30% Pre-Consumer Recycled Content
<b>Flammability</b>	Radiant Panel ASTM E-648-17a - Class A
<b>Smoke Density</b>	NFPA-258 or ASTM E-662-17a - ≤ 450
<b>Methaenamine Pill Test</b>	CPSC FF 1-70 or ASTM D 2859-16 - Self-Extinguishing
<b>Temperature Range</b>	-15°F to 160°F (-26°C to 71°C)
<b>Other</b>	ADA / BS 8300 / ISO 21542 Compliant



800.999.0400  
[standardtextile.com/interiors](http://standardtextile.com/interiors)

**STANDARD**  
TEXTILE est. 1940